


**Reference: S1403**

## Miko 275 S1403

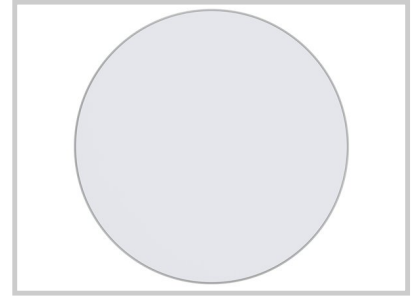

<b>Height (mm)</b>	57
<b>Diameter (mm)</b>	Ø275
<b>System power (W)</b>	10W
<b>Luminous flow (lm)</b>	1250lm
<b>Voltage</b>	220-240V AC
<b>Degree of protection</b>	IP44
<b>Luminaire life (h)</b>	50'000
<b>Driver lifetime (h)</b>	50'000
<b>Beam angle</b>	120°
<b>Finishing</b>	White
<b>Light source</b>	SMD
<b>IK resistance</b>	IK08
<b>IRC</b>	80
<b>Diffuser</b>	Opal
<b>Fixation</b>	Applique
<b>CDL type</b>	Direct et indirect
<b>Protection class</b>	Classe II
<b>Warranty</b>	5ans
<b>Color temperature</b>	4000K
<b>Light regulation</b>	Dali
<b>Operating temperature</b>	-20°C ~45°C
<b>Presence detector</b>	Sur demande
<b>Light detector</b>	Sur demande
<b>Orientation</b>	Non
<b>Efficiency</b>	120lm/W
<b>Flicker</b>	Sans scintillement
<b>Weight</b>	0,86Kg

Sous réserve de modifications techniques car nos produits sont constamment améliorés.  
We reserve the right to make technical changes as our products are constantly being improved.  
Wir behalten uns das Recht vor, technische Änderungen vorzunehmen, da unsere Produkte ständig verbessert werden.