


Reference: **F7208**

Nifty 300 F7208

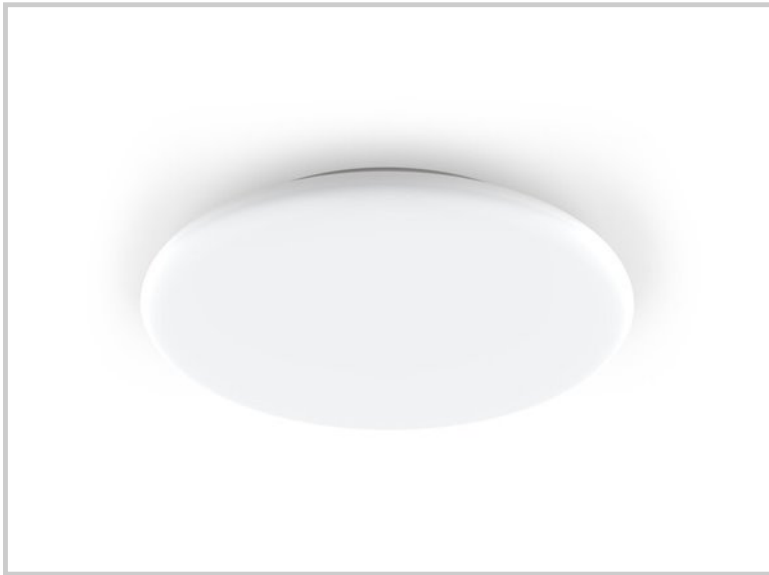

Diameter (mm)	Ø300
Luminous flow (lm)	1850lm
Degree of protection	IP54
Driver lifetime (h)	50'000
Finishing	White
IK resistance	IK08
Diffuser	Opal
CDL type	Direct
Matter	PC
Color temperature	5700K
Operating temperature	-20°C ~45°C
Light detector	Oui
Efficiency	~100lm/W
Flicker	Sans scintillement

stamment améliorés.
stantly being improved.
Wir behalten uns das Recht vor, technische Änderungen vorzunehmen, da unsere Produkte ständig verbessert werden.

