


Reference: D10252

LAKE18T D10252



| | |
|-------------------------|-------------|
| Depth (mm) | 90 |
| Diameter (mm) | 172mm |
| Embedding diameter (mm) | 150mm |
| System power (W) | 20W |
| Luminous flow (lm) | 1900lm |
| Voltage | 200-240V AC |
| Degree of protection | IP54 |
| Luminaire life (h) | 50'000H |
| Driver lifetime (h) | 50'000H |
| Beam angle | 75° |
| Finishing | White |
| Light source | SMD2835 |
| IK resistance | IK06 |
| MacAdam | 6 |
| IRC | 80 |
| Fixation | Trimless |
| Driver output amperage | 450mA |
| Driver output voltage | 30-40V DC |
| Protection class | Class II |
| Warranty | 3 years |
| Color temperature | 3000K |
| Light regulation | DALI |
| Operating temperature | -20°C ~40°C |
| Orientation | Fixe |

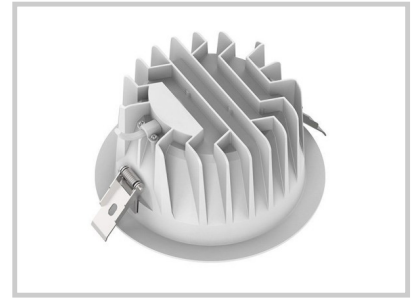