
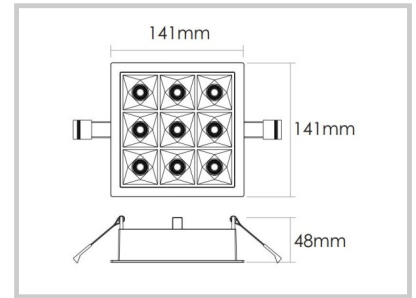


Reference: D20350

HALO9E D20350

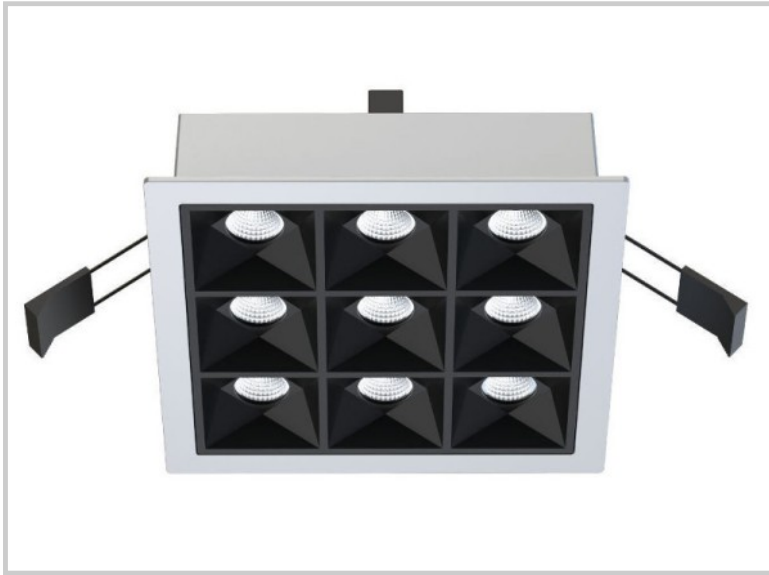

Length (mm)	141
Width (mm)	141
Depth (mm)	48
Largeur encastrement (mm)	130
Embedding depth (mm)	130
System power (W)	18W
Luminous flow (lm)	1900lm
Voltage	200-240V AC
Degree of protection	IP20
Luminaire life (h)	50'000H
Driver lifetime (h)	50'000H
Beam angle	65°
Finishing	Black -RAL7021
Light source	LED 3535
UGR	17
MacAdam	3
IRC	80
Diffuser	PC
Fixation	Encastré
CDL type	Direct
Driver brand	BOKE
Driver output amperage	600mA
Driver output voltage	3-42V
Protection class	Class II
Matter	
Warranty	5 years
Color temperature	3000K
Light regulation	DALI
Operating temperature	-20°C ~40°C