


Reference: P04050

## UPDN3030 P04050



Recessed length (mm)	295mm
Largeur encastrement (mm)	295
Embedding depth (mm)	10
System power (W)	12W
Luminous flow (lm)	1126lm
Voltage	24-30V
Degree of protection	IP40
Luminaire life (h)	50'000H
Driver lifetime (h)	90'000H
Beam angle	120°
Light source	SMD2835
UGR	22
IK resistance	IK06
MacAdam	3
IRC	80
Fixation	Suspendu
Driver brand	Lifud
Driver output amperage	0.35A
Driver output voltage	220-240V
Warranty	3 years
Color temperature	3000K
Light regulation	On-off
Operating temperature	0° - 40°

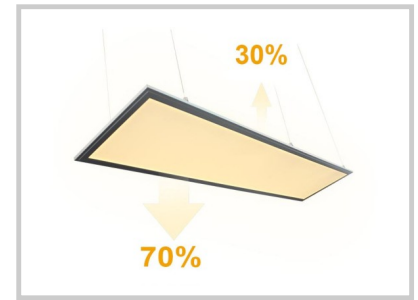